




# Flood Light

## Fit for

Hoardings / Advertising Boards / Billboards / Pandals / Bridges / Stadium / Subways / Parking Lots / Factories / Clubs / Hotels / Landscaping Building / Tunnels / Gardens / Stages / etc.

## Variants

30W - 600W

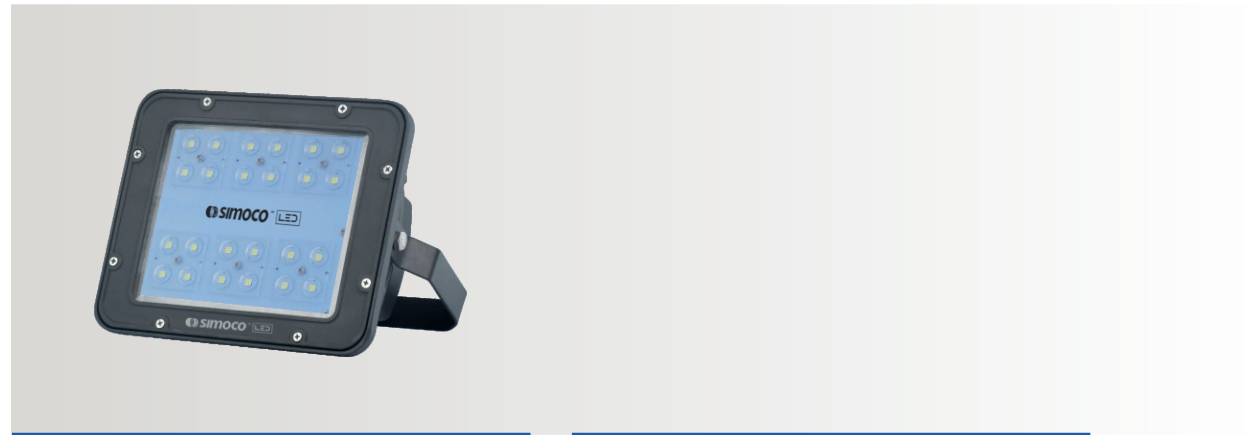

## Technical Specs

Details	Values
Voltage	AC 100 - 300V 50 / 60Hz
Operating	AC 220 - 240V 50 / 60Hz
PF / THD	> 0.95 / < 10%
Driver Efficiency	> 87%
LED Make	NICHIA / OSRAM / SEOUL / CREE / BRIDGELUX
LED Type	High Power LED
LED Life	50,000 Hrs
Lumen Efficacy	> 120 Lm/W
CRI	> 70
CCT	2700 ~ 3500K / 4000K / 5700 ~ 6500K
Lens / Beam Angle	Yes / > 120°
Body Material	Aluminum Pressure Die Cast + Toughened Glass / PC Lens
Body Colour	Gray
Working Temperature	-20°C to +50°C
Compliance	BIS / LM79 / LM80 / IP67 / IK08 / RoHS
Dimming	Optional or as per requirement
Surge	4KV Internal (Built-in) / 10KV or 20KV External (Optional)

## Variants

Models	Watt
SLSL30CL	30W
SLSL50CL	50W
SLSL70CL	70W
SLSL100CL	100W
SLSL120CL	120W
SLSL150CL	150W
SLSL180CL	180W
SLSL200CL	200W
SLSL250CL	250W
SLSL300CL	300W
SLSL320CL	320W
SLSL350CL	350W
SLSL400CL	400W
SLSL450CL	450W
SLSL500CL	500W
SLSL550CL	550W
SLSL600CL	600W

# Any wattage up to 600W as per customer requirement upon order.  
 # Product / picture & specification are subject to change without prior notice.  
 # Product size is approximate and subject to change due to continuous development.